

PROJECT:

LOCATION:

ENGINEER:


SALES ENGINEER:

ARCHITECT:

CONTRACTOR:

DATE:

UR1, UR2, UR3 – Flexible Tubing w/ external steel helix

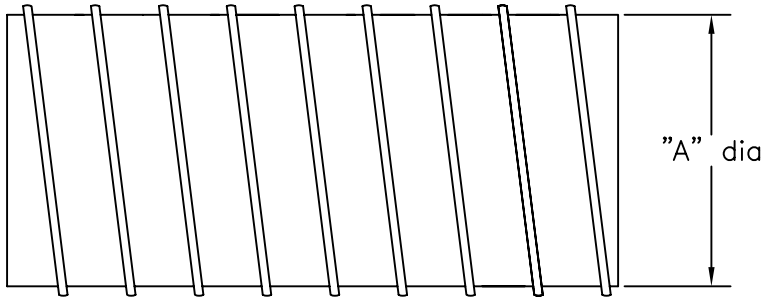

CONSTRUCTION: Urethane with a mechanically bonded corrosion resistant helix.

Mechanically bonded external helix offers a strong, adhesive-free construction with superior wear resistance.

TEMPERATURE RANGE: -20 F to 250 F

COLOR: UR1 (clear), UR2 (clear), UR3 (black) w/ metal helix

FABRIC VARIATIONS: UR1 (12 mil), UR2 (20 mil), UR3 (30 mil)

Dia. (in)	UR1 lb/ft	UR2 lb/ft	UR3 lb/ft
4	0.5	0.7	1.1
5	0.6	1.0	1.5
6	0.7	1.3	1.8
8	0.9	1.6	2.1
10	1.2	2.0	2.5

SCHEDULE

ITEM	QTY	MODEL	A	LENGTH	REFERENCE

NOTES