
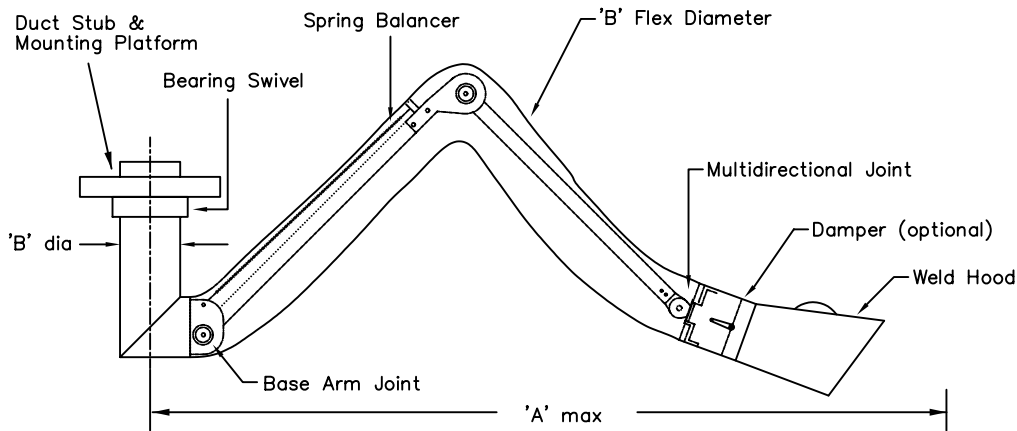


MODEL	'A'	'B'	MODEL	'A'	'B'
IAFE 6050	5'	6"	IAFE 6100	10'	6"
IAFE 8050	5'	8"	IAFE 8100	10'	8"
IAFE 6075	7.5'	6"			
IAFE 8075	7.5'	8"			

Special lengths and diameters may be available upon request.

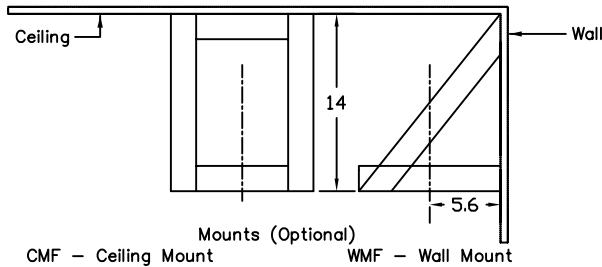

Light package and damper optional.

SCHEDULE

ITEM	QTY	MODEL	REFERENCE

NOTES

- Arm – Aluminum
- Arm Joint – Steel
- Wall or ceiling mount optional. (see FAFE submittal)
- Weld Hood – galvanized, damper optional, (stainless, aluminum, polycarbonate, and fiberglass optional)
- Flexible Tubing – type NG neoprene impregnated fiberglass with helical support. (standard)
- Type SG, PG and MG flexible tubing optional.

PROJECT _____

LOCATION _____

ARCHITECT _____

ENGINEER _____

CONTRACTOR _____

SALES ENGINEER _____