




# SUBMITTAL

## FLEXIBLE HOSE W/EXTERNAL HELIX

PROJECT:

LOCATION:	ENGINEER:	SALES ENGINEER:
ARCHITECT:	CONTRACTOR:	DATE:

### HT2010 - FLEXIBLE HOSE W/ EXTERNAL HELIX

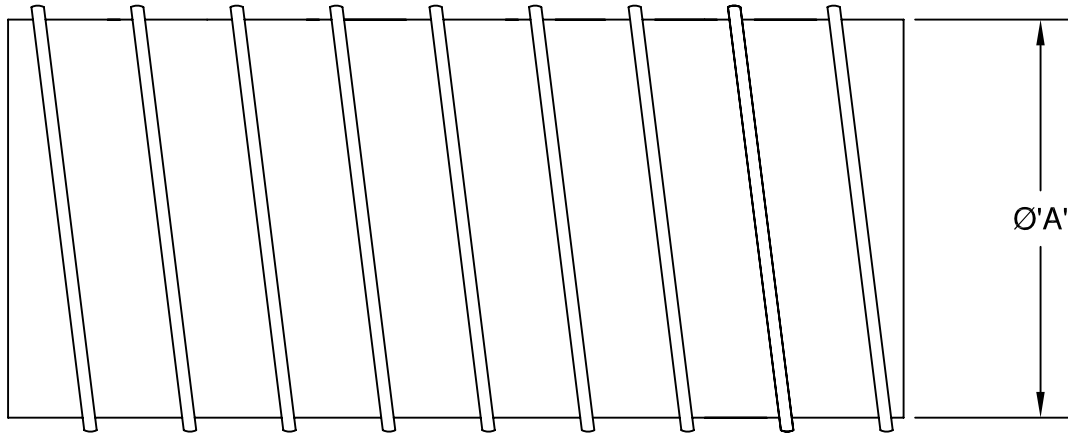

Ø'A'	LB/FT
3	1.00
4	1.29
5	1.60
6	1.93
8	2.57
10	3.20

### SCHEDULE

ITEM	QTY	MODEL	DIA.	LENGTH	REFERENCE

**NOTES:**

CONSTRUCTION: SPECIAL-COATED 3-PLY FABRIC WITH EXTERNAL STAINLESS STEEL HELIX.  
 TEMPERATURE RANGE: -75° F TO 2010° F.\*  
 COLOR: RED OUTER LAYER, STAINLESS STEEL MESH INNER LAYER WITH STAINLESS STEEL HELIX.  
 BENEFITS: ASBESTOS-FREE FABRIC, SPECIALLY COATED WITH HEAT-STABILIZERS, REINFORCED WITH STAINLESS STEEL WIRE MECHANICALLY BONDED EXTERNAL STAINLESS STEEL HELIX.  
 COMPRESSION RATIO: 2:1.  
 ALL DIMENSIONS IN INCHES AND NOMINAL.

\*VENTAIRE TEMPERATURE RANGE STATED BASED ON INDUSTRY STANDARD BAKE TEST. WHEN ADDITIONAL AMBIENT AIR IS INTRODUCED INTO THE SYSTEM THIS TEMPERATURE RANGE CAN BE INCREASED.