

PROJECT:

LOCATION:


ENGINEER:

SALES ENGINEER:

ARCHITECT:

CONTRACTOR:

DATE:

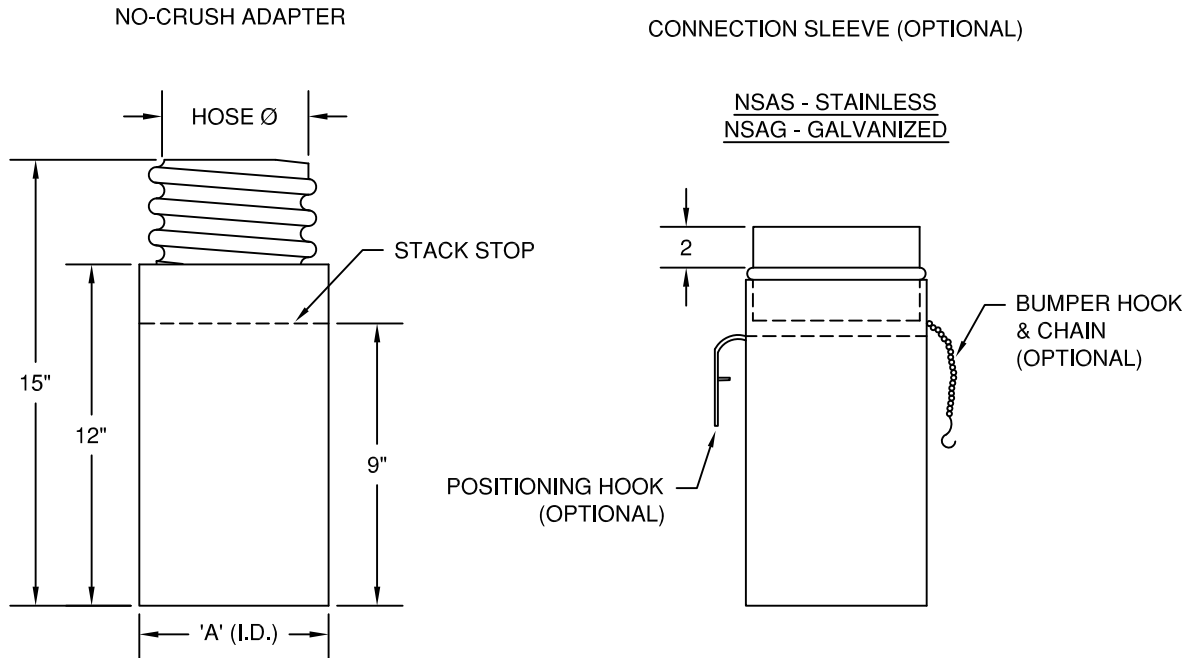

MODEL	HOSE Ø*	'A'
DSR 605	5	6
DSR 606	6	6
DSR 8600	6	8
DSR 9600	6	9

SCHEDULE

ITEM	QTY	MODEL	REFERENCE

NOTES:

ALL DIMENSIONS IN INCHES AND NOMINAL.

CONSTRUCTION: SPECIAL FORMULATED RUBBER COMPOUND DESIGNED TO WITHSTAND EXHAUST TEMPERATURES UP TO 600° F.

*HOSE DIAMETERS ARE FOR MODEL N1 HOSE. OTHER HOSES REQUIRE THE THREADS BE REMOVED AND A CONNECTION SLEEVE INSTALLED.

OPTIONAL CONNECTION SLEEVES CONSTRUCTED OF 20 GA. GALV. OR STAINLESS STEEL.