

PROJECT:

LOCATION:

ENGINEER:


SALES ENGINEER:

ARCHITECT:

CONTRACTOR:

DATE:

EXH - FLEXIBLE HOSE W/ EXTERNAL HELIX

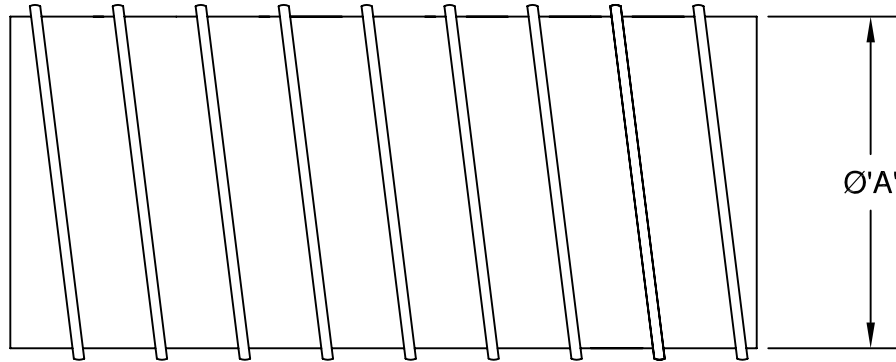

Ø'A'	LB/FT
3	0.65
4	0.85
5	1.17
6	1.28
8	1.70
10	2.13

SCHEDULE

ITEM	QTY	MODEL	'A'	LENGTH	REFERENCE

NOTES:

CONSTRUCTION: FIBERGLASS FABRIC COATED WITH MODIFIED SILICONE COMPOUND (INTERIOR & EXTERIOR) WITH AN EXTERNAL GALVANIZED STEEL HELIX.

TEMPERATURE RANGE: -5° F TO 850° F.*

COLOR: ORANGE WITH METALLIC HELIX.

BENEFITS: HOSE IS LIGHT WEIGHT, EXTREMELY FLEXIBLE & CAN HANDLE INTENSE EXHAUST TEMPERATURES. MECHANICALLY BONDED HELIX OFFERS STRONG, ADHESIVE FREE CONSTRUCTION RESISTANT TO EXTERNAL ABRASION SUCH AS CONTACT WITH CONCRETE FLOORING.

COMPRESSION RATIO: 6:1.

ALL DIMENSIONS IN INCHES AND NOMINAL.

*VENTAIRE TEMPERATURE RANGE STATED BASED ON INDUSTRY STANDARD BAKE TEST. WHEN ADDITIONAL AMBIENT AIR IS INTRODUCED INTO THE SYSTEM THIS TEMPERATURE RANGE CAN BE INCREASED.