



SUBMITTAL

FLEXIBLE HOSE W/EXTERNAL HELIX

PROJECT:

LOCATION:

ENGINEER:


SALES ENGINEER:

ARCHITECT:

CONTRACTOR:

DATE:

HSG/HSGS- FLEXIBLE HOSE W/ EXTERNAL HELIX

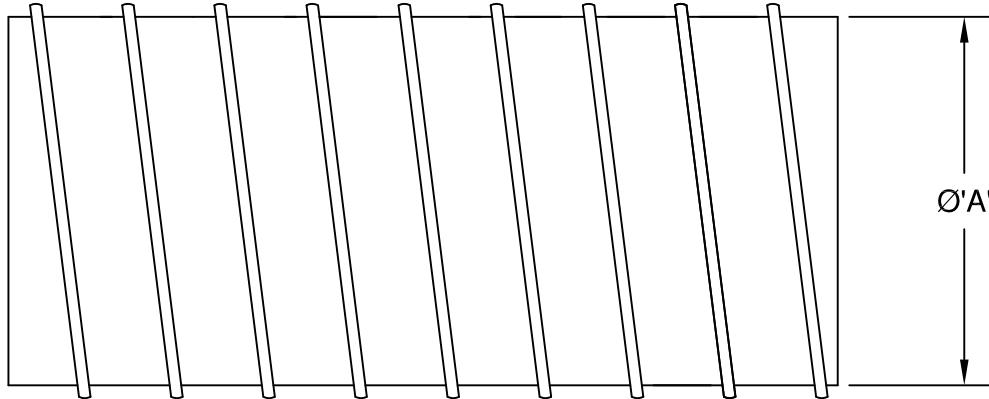

Ø'A'	LB/FT
3	0.63
4	0.70
5	0.88
6	1.17
8	1.44
10	2.13

SCHEDULE

ITEM	QTY	MODEL	DIA.	LENGTH	REFERENCE

NOTES:

CONSTRUCTION: FIBERGLASS COATED WITH 2 PLYS OF SILICONE (INTERIOR & EXTERIOR) WITH AN EXTERNAL METAL HELIX.

HELIX CONSTRUCTION: HSG (GALVANIZED STEEL), HSGS (STAINLESS STEEL).

TEMPERATURE RANGE: -75° F TO 625° F CONTINUOUS.*

COLOR: BLUE WITH METALLIC HELIX.

BENEFITS: LIGHT WEIGHT AND EXTREMELY FLEXIBLE. MECHANICALLY BONDED CORROSION RESISTANT HELIX OFFERS A STRONG, ADHESIVE-FREE CONSTRUCTION WITH SUPERIOR EXTERNAL WEAR RESISTANCE.

ALL DIMENSIONS IN INCHES AND NOMINAL.

*VENTAIRE TEMPERATURE RANGE STATED BASED ON INDUSTRY STANDARD BAKE TEST. WHEN ADDITIONAL AMBIENT AIR IS INTRODUCED INTO THE SYSTEM THIS TEMPERATURE RANGE CAN BE INCREASED.