



SUBMITTAL

FLEXIBLE HOSE W/EXTERNAL HELIX

PROJECT:

LOCATION:

ENGINEER:


SALES ENGINEER:

ARCHITECT:

CONTRACTOR:

DATE:

HT1000 - FLEXIBLE HOSE W/ EXTERNAL HELIX

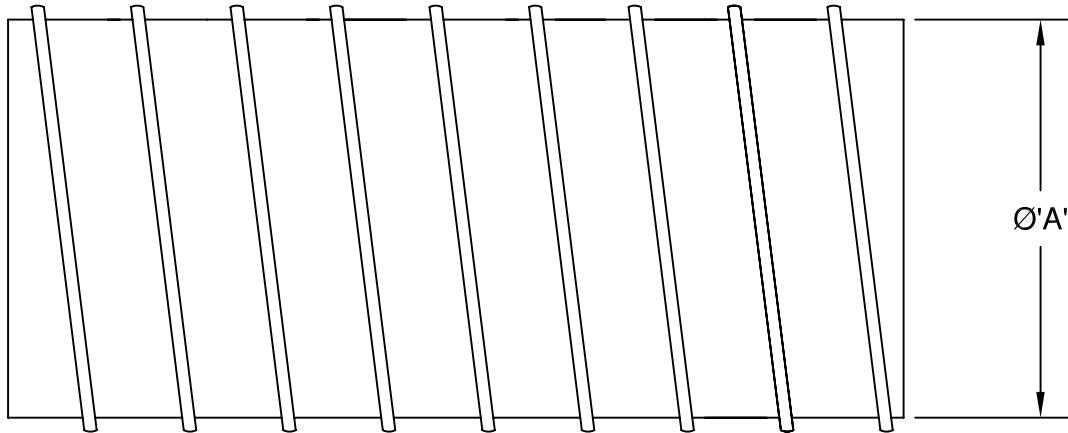

Ø'A'	LB/FT
6	1.14
8	1.52
10	1.64
12	1.97
14	2.30
16	2.69

SCHEDULE

ITEM	QTY	MODEL	'A'	LENGTH	REFERENCE

NOTES:

CONSTRUCTION: SPECIAL-COATED HIGH TEMPERATURE FABRIC OUTER AND HEAT RESISTANT IMPREGNATED GLASS FABRIC INNER WITH EXTERNAL GALVANIZED STEEL HELIX.

TEMPERATURE RANGE: -5° F TO 1000° F.*

BENEFITS: HOSE HAS ASBESTOS-FREE FABRIC, REINFORCED WITH STAINLESS STEEL WIRE, MECHANICALLY BONDED WITH EXTERNAL HELIX, UL94,VO FLAME RESISTANT

COMPRESSION RATIO: 6:1.

ALL DIMENSIONS IN INCHES AND NOMINAL.

*VENTAIRE TEMPERATURE RANGE STATED BASED ON INDUSTRY STANDARD BAKE TEST. WHEN ADDITIONAL AMBIENT AIR IS INTRODUCED INTO THE SYSTEM THIS TEMPERATURE RANGE CAN BE INCREASED.