



SUBMITTAL

FLEXIBLE HOSE W/EXTERNAL HELIX

PROJECT:

LOCATION:

ENGINEER:


SALES ENGINEER:

ARCHITECT:

CONTRACTOR:

DATE:

HT2010 - FLEXIBLE HOSE W/ EXTERNAL HELIX

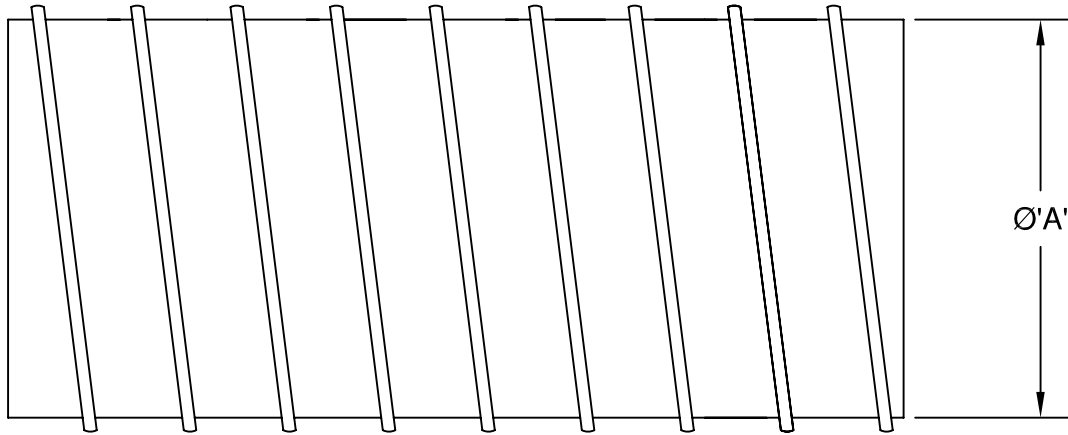

Ø'A'	LB/FT
3	1.00
4	1.29
5	1.60
6	1.93
8	2.57
10	3.20

SCHEDULE

ITEM	QTY	MODEL	DIA.	LENGTH	REFERENCE

NOTES:

CONSTRUCTION: SPECIAL-COATED 3-PLY FABRIC WITH EXTERNAL STAINLESS STEEL HELIX.
 TEMPERATURE RANGE: -75° F TO 2010° F.*
 COLOR: RED OUTER LAYER, STAINLESS STEEL MESH INNER LAYER WITH STAINLESS STEEL HELIX.
 BENEFITS: ASBESTOS-FREE FABRIC, SPECIALLY COATED WITH HEAT-STABILIZERS, REINFORCED WITH STAINLESS STEEL WIRE MECHANICALLY BONDED EXTERNAL STAINLESS STEEL HELIX.
 COMPRESSION RATIO: 2:1.
 ALL DIMENSIONS IN INCHES AND NOMINAL.

*VENTAIRE TEMPERATURE RANGE STATED BASED ON INDUSTRY STANDARD BAKE TEST. WHEN ADDITIONAL AMBIENT AIR IS INTRODUCED INTO THE SYSTEM THIS TEMPERATURE RANGE CAN BE INCREASED.