



SUBMITTAL

FLEXIBLE HOSE W/INTERNAL HELIX

PROJECT:

LOCATION:

ENGINEER:


SALES ENGINEER:

ARCHITECT:

CONTRACTOR:

DATE:

HTC- FLEXIBLE HOSE W/ INTERNAL HELIX

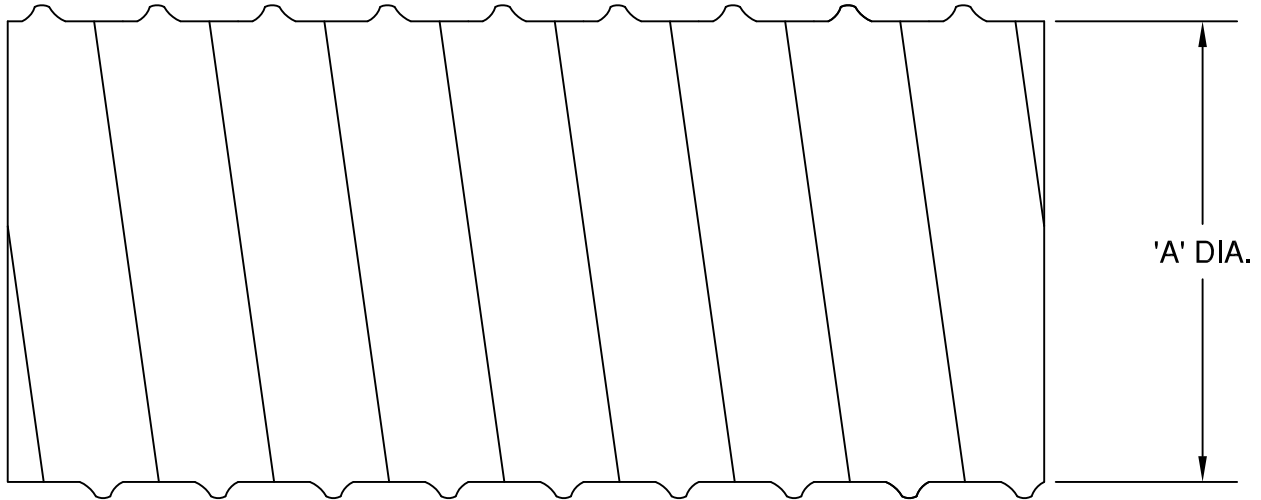

'A' DIA	LB/FT
4	0.60
5	0.75
6	0.90
8	1.10
10	1.50

SCHEDULE

ITEM	QTY	MODEL	DIA.	LENGTH	REFERENCE

NOTES:

CONSTRUCTION: 2 PLY TRIPLE OVERLAP ACRYLIC COATED POLYESTER WITH A FULLY ENCLOSED SPRING STEEL HELIX

TEMPERATURE RANGE: -20° F TO 350° F. CONTINUOUS. 550° F INTERMITTENT.

COLOR: BLACK FABRIC WITH BLACK WEARSTRIP.

BENEFITS: UL 94V-O FLAME RETARDANT HOSE IS EXTREMELY LIGHT WEIGHT AND AN EXTERNAL SCUFF STRIP PROVIDES EXCELLENT ABRASION RESISTANCE.

ALL DIMENSIONS IN INCHES AND NOMINAL.

*VENTAIRE TEMPERATURE RANGE STATED BASED ON INDUSTRY STANDARD BAKE TEST. WHEN ADDITIONAL AMBIENT AIR IS INTRODUCED INTO THE SYSTEM THIS TEMPERATURE RANGE CAN BE INCREASED.