



SUBMITTAL

FLEXIBLE HOSE W/INTERNAL HELIX

PROJECT:

LOCATION:

ENGINEER:


SALES ENGINEER:

ARCHITECT:

CONTRACTOR:

DATE:

HTN - FLEXIBLE TUBING W/ INTERNAL HELIX

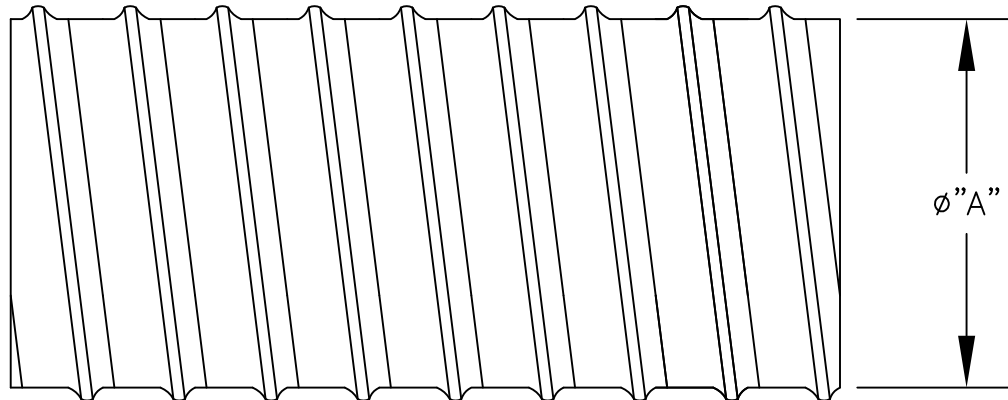

'A' DIA	LB/FT
4	0.5
5	0.6
6	0.8
8	1.1
10	1.4

SCHEDULE

ITEM	QTY	MODEL	DIA.	LENGTH	REFERENCE
		HTN			

NOTES:

CONSTRUCTION: 2 PLY REINFORCED NOMEX OUTER LAYER AND SILICONE COATED FIBERGLASS INNER LAYER WITH A FULLY ENCLOSED STEEL WIRE SUPPORTED WITH AN ARAMID CORD.

HOSE TEMPERATURE RANGE: -60° F TO 600° F. CONTINUOUS DUTY, BAKING TEST.

EXHAUST GAS TEMPERATURE RANGE: -60° F TO 1250° F. INTERMITTENT EXHAUST TEMPERATURES.*

COLOR: RED OXIDE.

BENEFITS: HANDLES HIGH AND LOW TEMPERATURE APPLICATIONS. COMBINES THE HIGH TEMPERATURE RESISTANCE OF SILICONE & SUPERIOR FLEXIBLE FATIGUE OF NOMEX AND FIBERGLASS.

NOT RECOMMENDED FOR APPLICATIONS WHERE THE HOSE WILL DRAG ACROSS THE FLOOR.

ALL DIMENSIONS IN INCHES AND NOMINAL.

*TEMPERATURE RANGE ASSUMES VENTILATION SYSTEM IS SIZED PROPERLY.