



SUBMITTAL

FLEXIBLE METAL HOSE

PROJECT:

LOCATION:

ENGINEER:


SALES ENGINEER:

ARCHITECT:

CONTRACTOR:

DATE:

G12-G18/S12-S18- FLEXIBLE METAL HOSE

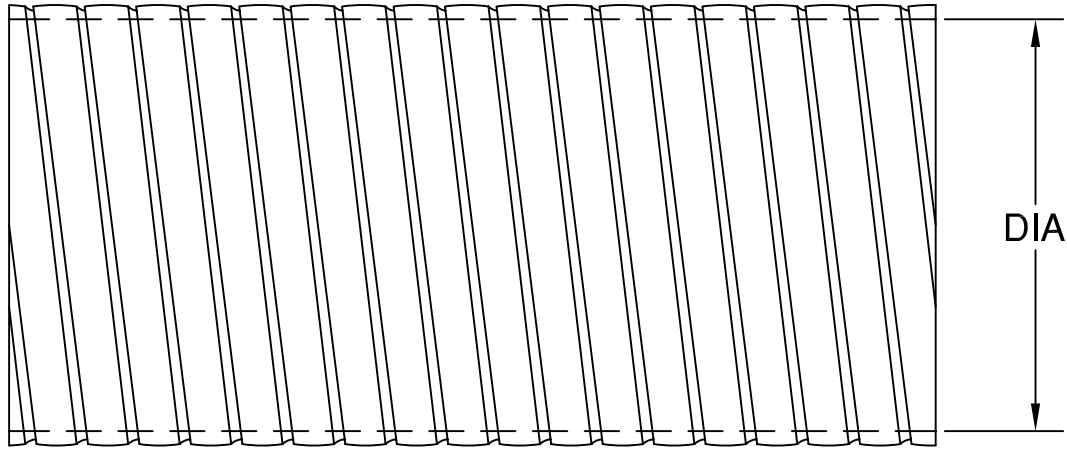

- G12 - GALVANIZED INTERLOCKING FLEX. METAL THICKNESS -0.012 INCHES
- G16 - SAME AS G12 EXCEPT METAL 0.016 INCHES THICK.
- G18 - SAME AS G12 EXCEPT METAL 0.018 INCHES THICK.
- S12 - 304 STAINLESS INTERLOCKING FLEX. METAL THICKNESS- 0.012 INCHES
- S16 - SAME AS S12 EXCEPT METAL 0.016 INCHES THICK.
- S18 - SAME AS S12 EXCEPT METAL 0.018 INCHES THICK.

AVAILABLE DIAMETERS (IN.)

- G12 - 3, 4, 5, 6
- G16 - 3, 4, 5, 6, 8, 10
- G18 - 3, 4, 5, 6, 8, 10
- S12 - 3, 4, 5, 6
- S14 - 3, 4, 5, 6, 8, 10
- S18 - 3, 4, 5, 6, 8, 10

WEIGHT/FT. (LBS.)

- 1.1, 1.4, 1.7, 2.0
- 1.4, 1.8, 2.3, 2.8, 3.5, 4.5
- 1.7, 2.3, 2.8, 3.3, 4.5, 6.0
- 1.1, 1.4, 1.7, 2.0
- 1.4, 1.8, 2.3, 2.8, 3.5, 4.5
- 1.7, 2.3, 2.8, 3.3, 4.5, 6.0

SCHEDULE

ITEM	QTY	MODEL	DIA.	LENGTH	REFERENCE

NOTES:

***CONSULT FACTORY FOR 316 S.S OR ALUMINUM CONSTRUCTION.