



# SUBMITTAL

## FLEXIBLE HOSE W/EXTERNAL HELIX

PROJECT:

LOCATION:

ENGINEER:


SALES ENGINEER:

ARCHITECT:

CONTRACTOR:

DATE:

### UR2- FLEXIBLE HOSE W/ EXTERNAL HELIX

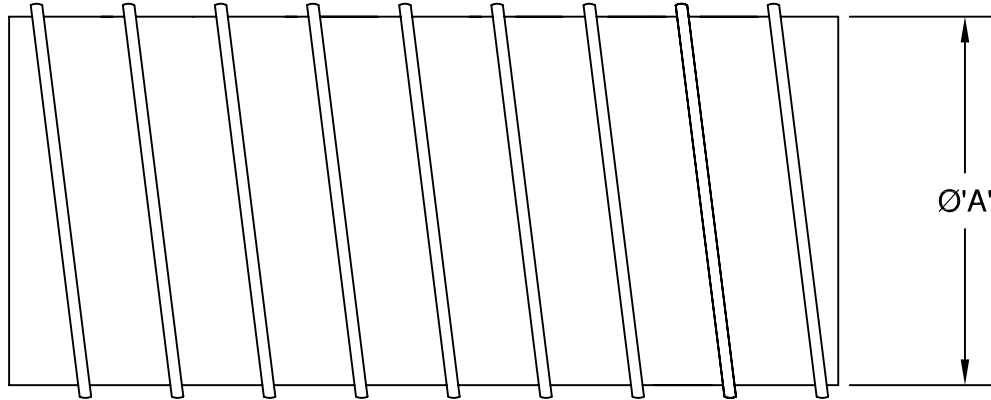

Ø'A'	LB/FT
4	0.40
5	0.47
6	0.54
8	0.74
10	0.94

### SCHEDULE

ITEM	QTY	MODEL	DIA.	LENGTH	REFERENCE

**NOTES:**

CONSTRUCTION: URETHANE WITH A GALVANIZED STEEL EXTERNAL HELIX.

TEMPERATURE RANGE: -40° F TO 195° F.\*

COLOR: CLEAR WITH METAL HELIX.

BENEFITS: HOSE IS LIGHT WEIGHT AND EXTREMELY FLEXIBLE. MECHANICALLY BONDED CORROSION RESISTANT HELIX OFFERS A STRONG, ADHESIVE-FREE CONSTRUCTION WITH SUPERIOR WEAR RESISTANCE. TRANSPARENCY MAKES LOCATING OBSTRUCTIONS EASY.

COMPRESSION RATIO: 6:1.

ALL DIMENSIONS IN INCHES AND NOMINAL.

\*VENTAIRE TEMPERATURE RANGE STATED BASED ON INDUSTRY STANDARD BAKE TEST. WHEN ADDITIONAL AMBIENT AIR IS INTRODUCED INTO THE SYSTEM THIS TEMPERATURE RANGE CAN BE INCREASED.